



# iAMC100

## FALCON SERIES

### KEY FEATURES

-  Designed to be lightweight with outstanding power density
-  Built for industrial strength
-  100% tested with individual performance reports
-  Self-cooling by design
-  ePConnected™ - Real Time Data Monitoring (RTDM)
-  Superior quality insulation provides long life and high reliability of windings

## DATASHEET

### Fly Higher. Fly Longer. Fly Smarter.

Uncrewed aerial vehicle (UAV) electronics have evolved to meet more demanding mission requirements. More intelligent energy supply and controller designs continually improve on efficiency, ensure reliability, reduce weight, minimize heat dissipation, and lower cost. The greater levels of energy and performance efficiencies delivered in the Falcon iAMC100 meets the most stringent payload demands and UAV design requirements.

### Intelligent Air Motor Controllers

This USA-made ePropelled intelligent Air Motor Controller (iAMC100) or electronic speed controller (ESC), works alone or alongside our powerful Falcon propulsion motors (PMs). Together, they create a high-performance, high-efficiency propulsion solution for your demanding UAV designs.

The iAMC100 transforms DC input voltage into a 3-phase AC output voltage and acts as the brain of the PM. iAMC100s deliver sensorless Field Oriented Control (FOC), detecting minute changes in the PM's direction, acceleration, and other variables to automatically adjust for optimized stability and precise flight control.




## iAMC100 TECHNICAL SPECIFICATIONS

PARAMETER	VALUES/DETAILS
Input Voltage Range	6S Lixx0 to 20S Lixx0
Motor Compatibility	Brushless, Sensorless
Burst Current (5 s)	50 Arms
Output Phase Current (Peak)	35 Arms
Output Phase Current (Continuous)	25 Arms
Input Voltage	48 VDC   60 VDC   72 VDC
Peak Output Power (T/L1 - 180 s)	1900 W   2200 W   2500 W
Continuous Output Power (TFL2 - 2160 s)	1100 W   1500 W   1700 W
Efficiency	98%
Internal BEC3	None
PWM Rate	Variable Switching Frequency
Advance Angle Control	0 to 50 Degrees
Maximum Frequency	2700 Hz
Ambient Temperature Range	0°C to 40°C (32°F to 104°F)
Maximum Temperature of MOSFET	125°C (257°F)
ePropelled Motor Temperature Protection	Yes
Power Lead	3.5 mm (0.138 in) Connector with 10 AWG
Motor Lead	3.5 mm (0.138 in) Connector with 10 AWG
Communication	CAN 2.0
Speed Commands	PWM, ProShot, DShot (Telemetry shared via CAN)
Data Logging	Micro SD Card / EEPROM
Active Parameter Monitoring (APM)4	Yes
Anti-Spark Circuitry	Yes
IP Rating	IP55
Cooling AirFlow Continuous Operation	2 m/s
Cooling AirFlow Peak Operation	5 m/s
CAN Connector	SM04B-GHS-TB
CAN Receptacle	GHR-04V-S
Speed Command Connector	SM03B-GHS-TB
Speed Command Receptacle	GHR-03V-S
Weight	150 g
Dimensions (L x W x H)	110 mm x 59 mm x 46 mm

Notes

- Lixx = Lithium ion (or) lithium polymer
- T/L = Take-off and landing
- TFL = Take-off, flying, and landing
- Isolated 5 V required for PWM speed reference
- APM monitors 3-phase voltage, current, DC bus voltage and MOSFET temperature

MECHANICAL DIMENSIONS

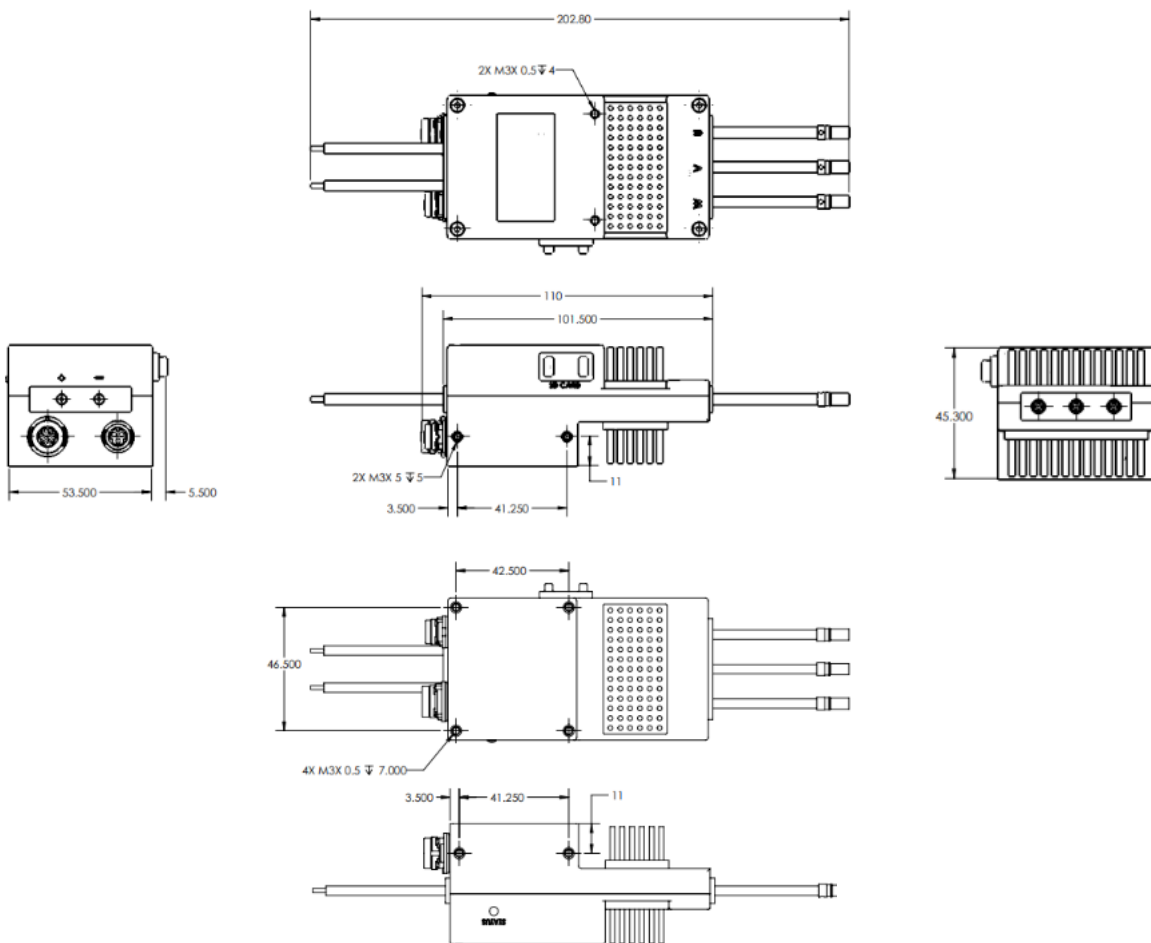

\*All Dimensions are in mm.



**Note:** All specifications are subject to change without notice. For more information, including ordering products, please contact us at [info@epropelled.com](mailto:info@epropelled.com) | Phone: +1 (603) 236 7444